

Product catalogue
burmatex®






We are passionate about making our flooring products and aim to create truly inspirational environments for people to enjoy



burmatex® offers an expansive product range; our traditional fibre bonded sheet and tile ranges include entrance products and ground-breaking structure bonded ranges, which present an expansive colour palette. Our multilevel loop, low level loop, textured loop and cut pile tufted carpet tile ranges, including a specialist entrance barrier product, are inspired by the latest and predicted future design and colour trends.



burmatex® is committed to best environmental practice in our manufacturing, from the sourcing of raw materials – including recycled content – minimising and reprocessing waste, use of green electricity and recycled packaging. Because of this, the Building Research Establishment (BRE) has awarded our products the highest BREEAM ratings; mostly A+.

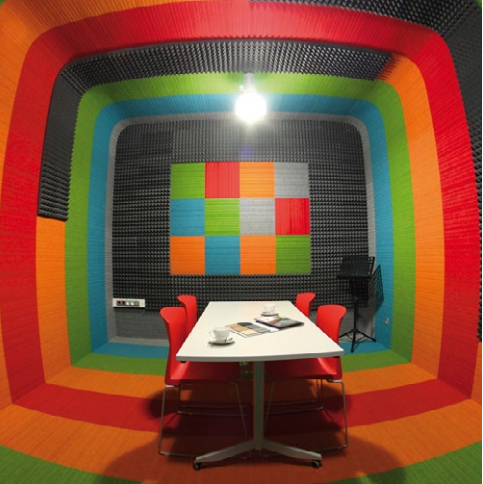

We hope that by reading our catalogue and visiting our website at **www.burmatex.co.uk**, we will inspire you to work with us to create really unique, captivating floor designs.

burmatex® is a leading UK manufacturer of contract carpets and carpet tiles. We are passionate about creating truly inspirational environments, reflected in our products unique nature across both design and manufacture.


Our products are suitable for use in heavy contract markets and used in a wide variety of private and public sector buildings, including schools, offices, universities and leisure centres.




The **burmatex**® design team are a driving force in developing product ranges which reflect colour and design trends as well as creating exclusive, bespoke carpet tiles to meet customers' needs and providing our free planned flooring layout design service.




burmatex® is a BS EN ISO 9001:2000 registered company (Cert No.FM1440). All products are tested to BSI/CEN standards in relation to durability, wear, flame retardancy, antistatic properties and colour fastness.

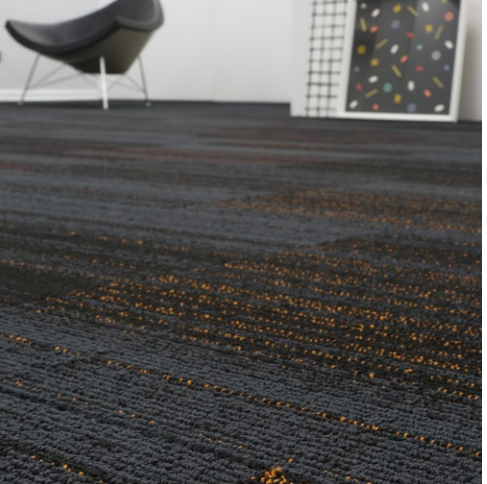




22901 light



22902 shade




22903 dark



22905 stone



22909 birch




22906 pave




22907 ground



22908 brick




22911 bloom



22910 air



22904 deep



22912 leaf

Specification

Product Description: Multilevel Loop
Pile Yarn Description: 100% Solution Dyed Aquafil Econyl® Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 5 mm +/-10%
Total Thickness: 7.5 mm +/-10%
Pile Weight: 910 g/m²
Tufts per m²: 236,220 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



rainfall

rainfall's inspiration was trying to capture those first moments of a summer storm. The first spots of rain punctuate the surface, gathering in intensity until the whole colour is several shades darker.

This multilevel loop product encompasses changes of tone in varying proportions throughout, resulting in an all over effect of subtlety combined with soft angles.

These characteristics ensure that each installation of appears slightly different from the last. An enticing palette of 12 colours provides bright and light options, through to more concentrated and atmospheric tones, suitable for all manner of installations and interiors.



22801 haiku



22802 sesame



22803 sumi




22809 mochi



22805 arashi



22806 yari



22810 matcha



22808 inkpot



22807 fuji



22811 orchid



22812 sakura



22804 lantern

Specification

Product Description: Multilevel Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 5 mm +/-10%
Total Thickness: 7.5 mm +/-10%
Pile Weight: 795 g/m²
Tufts per m²: 226,771 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




osaka

inspired by clashes in Japanese culture; new and old, warm and cool, urban and natural - **osaka** is a collection of contrasts that work seamlessly together.

The design's pattern (originally from a map of Osaka) can be interpreted in a multitude of ways; geometric and inspired by the traditional practise of origami, or organic and reminiscent of a bamboo forest floor.


The abstract nature of the design, teamed with a diverse colour palette, allows it to be both soft and strong, expertly working with any modern interior space.



22201 ice



22202 ridge



22203 point



22204 north



22205 moose




22206 anchor



22207 creek




22208 lake



22209 husky



22210 wolf



22211 spruce



22212 valley

Specification

Product Description: Multilevel Loop
Pile Yarn Description: 100% Solution Dyed Aquafil Econyl® Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 5 mm +/-10%
Total Thickness: 7.5 mm +/-10%
Pile Weight: 800 g/m²
Tufts per m²: 226,771 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



alaska


alaska is our first multilevel loop product and its name was also our inspiration.

A concise palette of twelve colours in this 800g product, combined with the tactile and textural finish, all relate to the invigorating outdoors of this beautiful state. This enables the creation of nature-inspired flooring schemes, while not excluding the possibility of a more classic effect.


Used alone, or in combination with other burmatex ranges such as **grade, axis** and **hadron, alaska** brings an additional layer of flexibility and creativity to our constantly evolving product portfolio.



21601 titanium



21615 ash




21603 sparkler




21616 arctic




21610 clay




21604 firefly




21608 moss




21607 flamingo




21605 crimson



21612 raspberry




21613 rust




21606 papaya




21611 starling



21609 mint



21614 violet



21602 cerulean



21617 electric

Specification

Product Description: Textured Loop Pile

Pile Yarn Description: 100% Solution Dyed Nylon 6,6 (Polyamide-PA)

Tile Dimensions: 50 cm x 50 cm

Pile Height: 3.5 mm +/-10%

Total Thickness: 6.5 mm +/-10%

Pile Weight: 800 g/m²

Tufts per m²: 177,165 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1




hadron

hadron is highly inspired by striking imagery of the hadron collider. Hyper-real bright bursts of colour, surround by dark space. Each colour-way from the collection has the same neutral, dark grey base, making it easy to delineate areas without harsh lines and creating seamless transitions across a floor. A variety of highlight colours are used, from intense pops of colour to mid tones, neutrals and semi-darks.


The inclusion of texture on this carpet tile, in a subtle weft style pattern, enhances the dispersed nature of the colours.



17415 cyan 5



17315 cyan 10



17215 cyan 60




17416 marina 5




17316 marina 10



17216 marina 60



17405 lime 5



17305 lime 10



17205 lime 60



17408 night 5




17308 night 10




17208 night 60



17403 orange 5



17303 orange 10



17203 orange 60



17413 magenta 5




17313 magenta 10



17213 magenta 60



17402 scarlet 5




17302 scarlet 10




17202 scarlet 60



17414 canary 5



17314 canary 10



17214 canary 60

Specification

Product Description: Textured Loop Pile

Pile Yarn Description: 100% Solution Dyed Nylon

Tile Dimensions: 50 cm x 50 cm

Pile Height: 4.5 mm +/-10%

Total Thickness: 7.0 mm +/-10%

Pile Weight: 680 g/m²

Tufts per m²: 180,976 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1




strands

strands is a vibrant and exciting 100% Nylon textured loop carpet tile range offering almost limitless opportunities for floor design.

Each tile starts with a background colour of mid grey with a black pinstripe and is then accented by one of eight striking key note colour stripes in three versions: - Strands 5; Strands 10 and Strands 60; so named because the key note colour stripe takes up 5%, 10% and 60% of the carpet tile respectively.


Strands offers the designer combinations of pattern and colour to create and develop unique floor designs starting from tessellated or brick in 5, 10 or 60 up to amazing effects such as random monolithic, brick repeat, chequerboard using combinations of 5,10 and 60. Schemes can be further enhanced using combinations of other burmatex ranges.



22101 frost




22103 wren



22104 mist



22102 sky




22105 blueprint



22106 fern



22109 orb




22108 jelly



22107 fuschia



22111 robin



22110 amber

Specification

Product Description: Textured Loop Pile
Pile Yarn Description: 100% Solution Dyed Aquafil Econyl Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 3.5 mm +/-10%
Total Thickness: 6.0 mm +/-10%
Pile Weight: 550 g/m²
Tufts per m²: 177,165 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



axis

axis is inspired by our surroundings; nature, art, food, and culture. Strong and bold, or rich and calm, the palette of eleven colours provides the axis for many different flooring schemes. Create a vibrant punch of colour, a calm oasis, or use in combination with other burmatex ranges such as **hadron**, **grade** or **strands**.

The relationship with **strands** is unique, in that all the colours in the strands palette now have a corresponding axis colour.


Each of the colours has been designed to be installed single direction – no need to quarter turn – with an inherent dark fleck to provide extra appearance retention without compromising the impact of the product.



19802 blue tin



19805 burnished copper



19801 galvanised steel



19806 green nickel



19804 permanganate



19803 warmed lead


Specification

Product Description: Textured Loop Pile
Pile Yarn Description: 100% Solution Dyed & Space Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 5 mm +/-10%
Pile Weight: 620 g/m²
Tufts per m²: 235.800 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




tandem

m is a high performance tile class 33, central to the design collection; this simply styled tile presents six colours from a natural palette which can be laid both monolithically and quarter turn suiting small and large spaces.
tandem works individually and alongside other ranges to complement and enhance a design colour; with a textured effect and enduring finish this gentle design effortlessly complements various finishes and furnishings.



21803 medium grey



21802 coal grey




21804 beige



21808 berry red



21806 sea blue




21807 denim blue



21805 apple green




21903 medium grey stripe




21902 coal grey stripe




1904 beige stripe



21908 berry red stripe



21906 sea blue stripe



21907 denim blue stripe



21905 apple green stripe




21801 jet black


Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 3.0 mm +/-10%
Total Thickness: 5.5 mm +/-10%
Pile Weight: 470 g/m² +/-10%
Tufts per m2: 196,850 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 63562000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1

go to




go to stripe




go to

go to offers two designs – plain and stripe in a popular colour palette of fifteen. Brighter and darker greys and blues are supported with red and green brights within the collection. Each colour except jet black has its own counterpart in the stripe design. You can mix and match the plain and stripe options to create more interesting floor layouts or define zones.


The range maintains the level of high performance and resilience that **burmatex**® carpet tiles are known for. **go to** is the perfect choice for users that are looking for a quick and easy carpet installation option.




32701 south beach



32702 palm springs



32703 ocean drive




32705 turtle bay




32704 havana town



32710 icelandic isle



32711 nordic fjord



32708 bergen city



32712 polar drift



32707 baffin island





32713 galapagos bay



32706 bora bora


Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm, 25 cm x 100 cm
Pile Height: 4 mm +/-10%
Total Thickness: 6.5 mm +/-10%
Pile Weight: 600 g/m²
Tufts per m2: 196,500 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




tivoli mist tile/plank

tivoli mist offers a flexible range of commercial carpet tiles, designed to provide creativity, colour and individuality. With colour pairings that blend seamlessly together, **tivoli mist** affords the possibility of transitioning from one zoned area to another without the use of hard lines.

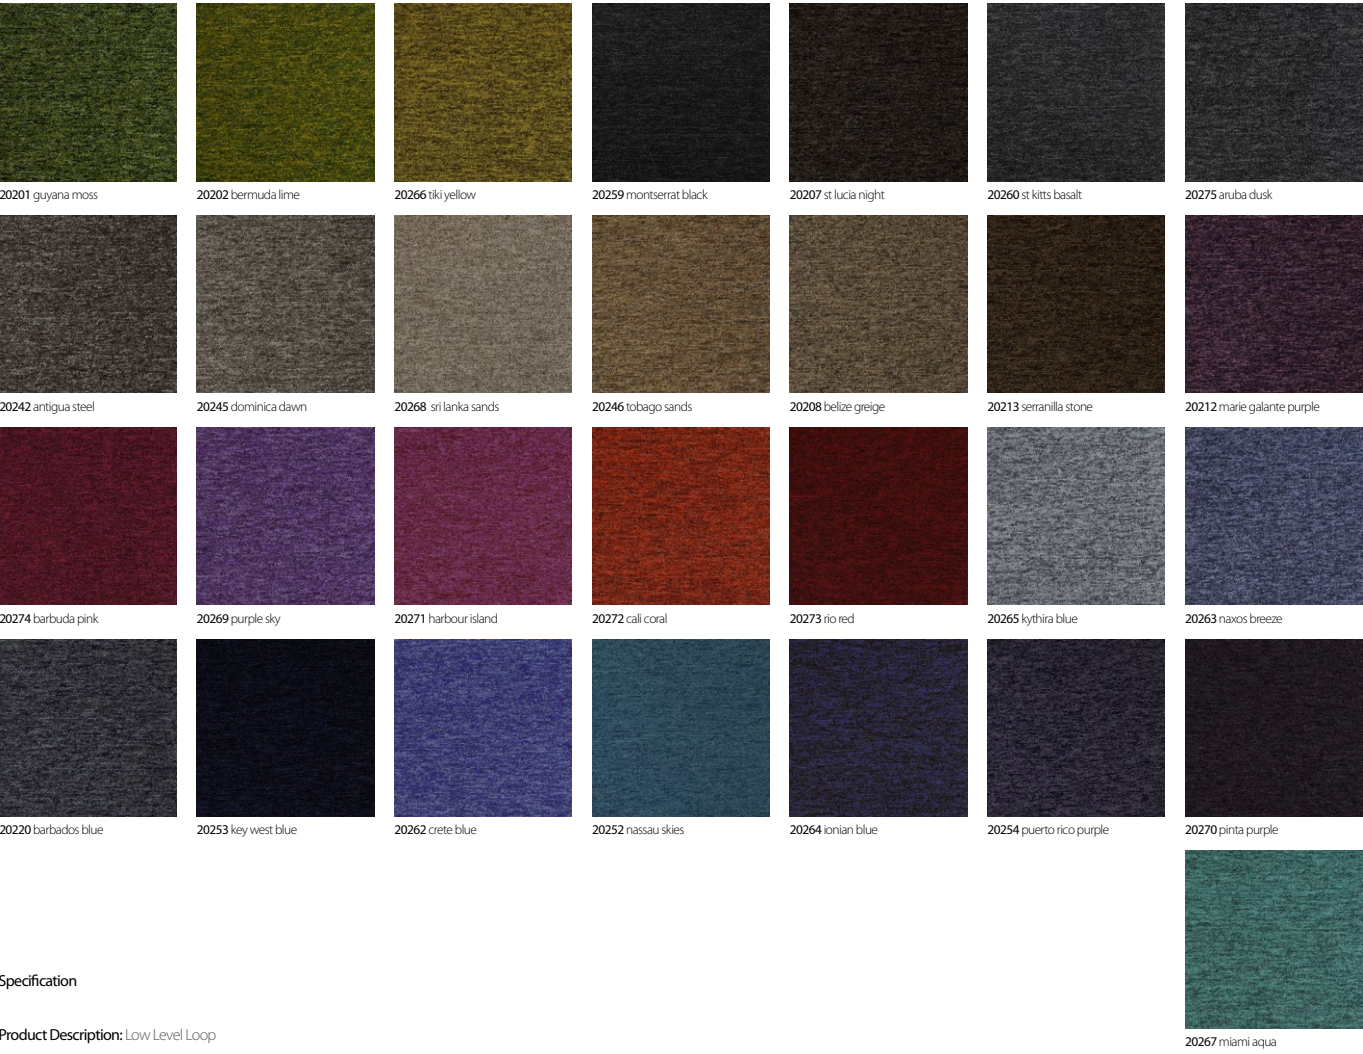


Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4 mm +/-10%
Total Thickness: 6.5 mm +/-10%
Pile Weight: 600 g/m²
Tufts per m²: 196,500 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



tivoli tile (2019)

tivoli presents a high performance loop pile (class 33) product offering, made with 100% solution dyed nylon and including **tivoli**, **tivoli online** and **tivoli multiline**.




online
20607 aegian sea



online
20608 haiti haze




online
20609 perissa sand



multiline
20703 melanesia grey




multiline
20707 tenerife black



multiline
20711 seychelles beige




multiline
20709 mediterranean topaz




multiline
20708 santorini blue



multiline
20712 cayman purple



multiline
20713 takutea red



multiline
20710 everglade green

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4 mm +/-10%
Total Thickness: 6.5 mm +/-10%
Pile Weight: 600 g/m²
Tufts per m²: 196,500 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



tivoli tile 2019 (cont.)

Varied plain, **tivoli**, classic pinstripe, **tivoli online** and contemporary striped, **tivoli multiline**, designs can be used individually or in a bespoke arrangement, with the expansive, modern colour palette enabling classic, neutral schemes or innovative, creative layouts.



21101 gu yana moss



21102 bermuda lime



21166 tiki yellow



21159 montserrat black



21160 st kitts basalt



21107 st lucia night



21175 aruba dusk



21142 antigua steel




21145 dominica dawn



21168 sri lanka sands



21108 belize greige



21165 kythira blue



21163 navos breeze



21120 barbados blue



21164 ionian blue



21152 nassau skies



21153 key west blue




21169 purple sky



21172 cali coral



21167 miami aqua




multiline
20703 melanesia grey



multiline
20707 tenerife black




multiline
21211 seychelles beige



multiline
21208 santorini blue



multiline
21212 cayman purple



multiline
21209 mediterranean topaz

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)

Tile Dimensions: 25 cm x 100 cm

Pile Height: 4 mm +/-10%

Total Thickness: 6.5 mm +/-10%

Pile Weight: 600 g/m²

Tufts per m²: 196,500 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1




tivoli plank 2019

tivoli carpet planks offer two loop pile designs – a solid colour **tivoli** and a stripe **tivoli multiline**. The colour selection creates a broad palette with complementary colours across the two designs developing creative installation options.

tivoli carpet planks are made with 100% solution dyed nylon and are suitable for heavy commercial use (class 33).



20223 nevis blue



20203 caicos azure



20211 barthelemy green



20204 tortola gold




20205 bahamas- orange



20210 bellamy red



20249 martinique-maroon



20206 green turtle



20230 grenada grey



20225 saona sage




20209 trinidad sea



20214 st martin sands



20258 panama brown



multiline
20702 pacific green




multiline
20704 polynesia beige



multiline
20701 ibiza blue



multiline
20705 mauritius mauve



multiline
20706 nion terracotta



online
20604 sardinian coral



online
20602 cyclades jade




online
20603 tahitian pearl



online
20606 baltic amber



online
20605 pamanzi earth



online
20601 atlantic cobalt

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4 mm +/-10%
Total Thickness: 6.5 mm +/-10%
Pile Weight: 600 g/m²
Tufts per m2: 196,500 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




tivoli tile

Varied plain, **tivoli**, classic pinstripe, **tivoli online** and contemporary striped, **tivoli multiline**, designs can be used individually or in a bespoke arrangement, with the expansive, modern colour palette enabling classic, neutral schemes or innovative, creative layouts.



21114 st martin sands



21103 caicos azure



21111 barthelemy green



21106 green turtle



21104 tortola gold



21105 bahamas orange




21110 bellamy red




21149 martinique maroon




multiline
21201 ibiza blue



multiline
21205 mauritius mauve



multiline
21206 reunion terracotta



multiline
21202 pacific green



multiline
21204 polynesia beige

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 25 cm x 100 cm
Pile Height: 4 mm +/-10%
Total Thickness: 6.5 mm +/-10%
Pile Weight: 600 g/m²
Tufts per m²: 196,500 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



tivoli plank

tivoli carpet planks offer two loop pile designs – a solid colour **tivoli** and a stripe **tivoli multiline**. The colour selection creates a broad palette with complementary colours across the two designs developing creative installation options.

tivoli carpet planks are made with 100% solution dyed nylon and are suitable for heavy commercial use (class 33).




6413 neutron blue




21401 stitch cosmic blue



6402 atomic blue



6422 planet blue



6434 blue asteroid



21402 stitch gravity blue




6420 titan slate



6435 lunar orbit




21405 stitch blue aurora



6437 polar ice




21403 stitch fusion black




6438 stellar silver



6440 moon dust



6404 iron grey



6439 universal grey



6441 black hole



6416 triton storm



6436 total eclipse




21404 stitch galaxy blue




6442 fossil



6443 frozen rock



6444 solar flare



6445 verdant star




6446 green crystal



6447 starburst



6448 ultraviolet



21406 stitch meteor



6449 granite pink



6450 cyber magenta



6451 nova red

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Nylon (Polyamide PA) Space Dyed & Recycled Solution Dyed
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4.8 mm +/-10%
Total Thickness: 7.3 mm +/-10%
Pile Weight: 550 g/m²
Tufts per m²: 196,500 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



infinity

infinity offers 2 designs – **infinity** and **infinity stitch** in a large well balanced palette of 30 colours.

Both the classic flecked design of **infinity** and the unique directional organic pattern of **infinity stitch** are ideal for various type of interiors like large open-plan office spaces, smaller individual offices, corridors, reception areas or public buildings.



denim
■ 21502 ■ 22502




indigo
■ 21503 ■ 22503



purple
■ 21506 ■ 22506



ruby
■ 21504 ■ 22504



silver
■ 21501 ■ 22501



zinc
■ 21508 ■ 22508



smoke
■ 21509 ■ 22509





crater
■ 21505 ■ 22505



abyss
■ 21507 ■ 22507


Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm, 25 cm x 100 cm
Pile Height: 3.5 mm +/-10%
Total Thickness: 6.0 mm +/-10%
Pile Weight: 620 g/m² +/-10%
Tufts per m²: 235,800 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 63562000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



grade tile & plank

The name **grade** links to the graduation between lighter tones and darker ones within each colour option. A researched and considered palette of nine colours gives great flexibility and longevity, whether using a single selection or creating your own combinations. Colours can subtly diffuse from one to another, or create drama by using blocks of contrasted areas



51435 fudge



51436 timber



51405 honey



51410 charcoal



51401 slate



51402 flint



51433 moonlight



51412 deep sea




51434 dumulus



51403 midnight



51432 atmosphere



51413 crystal



51418 delft




51411 ocean



51407 everglade



51406 spice



51437 poppy



51438 sandstone

Specification

Product Description: Low Level Loop

Pile Yarn Description: 100% Solution Dyed Nylon

Tile Dimensions: 50 cm x 50 cm

Pile Height: 4.5 mm +/-10%

Total Thickness: 7.0 mm +/-10%

Pile Weight: 550 g/m²

Tufts per m²: 176,850 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV


Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



balance



balance is a 100% solution dyed nylon level loop pile carpet tile, ideal for commercial, education and public sector projects. **balance's** 18 colourways have been inspired by an eclectic global palette which work equally well when used subtly or boldly over large areas or as accents to define smaller floor spaces.



black
■ 21001 ■ 22001

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm, 25 cm x 100 cm
Pile Height: 4.5 mm +/-10%
Total Thickness: 7.0 mm +/-10%
Pile Weight: 550 g/m²
Tufts per m²: 176,850 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 63562000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1

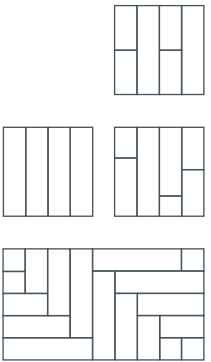

balance echo tile & plank

balance echo black is a dark, low level loop, carpet tile and plank design in 100% solution dyed nylon. With a combination of stripes and blocks this heavy contract (class 33), flexible design works in a mixture of installation styles. Able to be combined with both bright and neutral inserts, this multi-tile/multi-plank design enables the simple creation of an impressive installation.



19701 dark sepi



19702 space dust



19703 pencil lead



19704 classic grey



19705 grey slate



19706 blackboard


Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4.5 mm +/-10%
Total Thickness: 7.0 mm +/-10%
Pile Weight: 550 g/m²
Tufts per m2: 176,850 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 63562000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




balance stripe


balance stripe is a loop pile range in the Burmatex portfolio. Its timeless appearance combined with a classic and contemporary colour palette is perfect for offices, corporate buildings or commercial spaces. This BREEAM A+ rated collection can be easily combined with other Burmatex products from tufted, structured bonded and fibre bonded collections to create a unique scheme.



18804 earth




18805 rock



18801 storm



18803 cove



18802 marine



51436 timber



51441 cotton



51402 flint



51434 cumulus



51412 deep sea




51440 soot



51435 fudge



51410 charcoal




51433 moonlight



51403 midnight

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4.5 mm +/-10%
Total Thickness: 7.0 mm +/-10%
Pile Weight: 550 g/m²
Tufts per m²: 176,850 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



balance atomic

balance atomic is an exciting, contemporary loop pile, with a colour palette ranging from warm beiges, through greys, to cool blues. This BREEAM A+ rated collection comes in 3 co-ordinating designs; a plain, a pinstripe and a versatile, random effect, all of which work alone or complement each other perfectly to create a stylish, individual look for any interior.

balance atomic storm, marine, cove, earth and rock are multi tile designs. Each box of tiles contains a selection of these designs which can be laid monolithic, quarter turn or random to achieve the desired effect.



18501 grey

Specification

Product Description: Low Level Loop
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Pile Height: 4.5 mm +/-10%
Total Thickness: 7.0 mm +/-10%
Pile Weight: 550 g/m²
Tufts per m²: 176,850 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



balance greyscale

balance greyscale is a new dark grey 'field' tile which co-ordinates beautifully with most products from burmatex, including the 8 vibrant colourways from Strands and the new stylish Balance Atomic range. This BREEAM A+ rated loop pile tile provides a subtle, plain contrast against striped or textured areas, for meeting or breakout areas in offices or other corporate buildings.



1834 soap stone



1891 pewter cloud



1805 diamond dust



1803 concrete jungle



1802 zinc asphalt




1801 carbon steel




1809 ink stone



1814 blue monday



1813 lavender oil



1890 purple emperor



1886 pink diamond



1812 indigo snake




1882 turquoise mountain



1883 emerald coast




1830 lime street



1887 gold quest



1839 mandarin duck



1845 scarlet runner

Specification

Product Description: Structure Bonded®

Pile Yarn Description: 85% Polypropylene 15% Nylon

Tile Dimensions: 50 cm x 50 cm

Total Thickness: 7.8 mm +/-10%


Pile Weight: 950 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6

Flammability: Euroclass Bfl-s1



lateral®

lateral® is the definitive product offering for all commercial interiors, schools, public buildings, residential schemes and design and build projects. **lateral's** 'ground-breaking' design stems from our innovative, structure bonded manufacturing technology using an unusual mix of textures from cut through to loop pile. It is available in a range of 18 colours.



12812 quartz layer



12826 pewter cast



12830 diamond bolt



12806 steel cable




12828 suede ribbon



12829 black tar



12823 ink bar



12827 blue bay



12824 lavender star



12820 purple patch




12816 pink gin



12831 indigo run



12822 turquoise gem



12825 emerald green




12802 lime light



12818 gold finger



12801 sunset strip



12804 scarlet ribbon

Specification

Product Description: Structure Bonded®

Pile Yarn Description: 85% Polypropylene 15% Nylon

Tile Dimensions: 50 cm x 50 cm

Total Thickness: 8.0 mm +/-10%

Pile Weight: 1000 g/m²

Castor Chair Rating: BS EN 985 Pass

Body Voltage Test: BS ISO 6356:2000 <2kV

Colour Fastness To Light: Minimum grade 6


Flammability: Euroclass Bfl-s1




zip

zip is the next generation in structure-bonded® design, evolving from the technology that created lateral®.


zip uses subtle texture and contrasting colour for a striking effect. Combine **zip** with code and lateral® to produce a unique floor design.



12912 cool stone



12926 pewter track



12930 diamond coal



12906 metal shock



12928 night suede




12929 pitch black



12923 ink film




12927 blue reef



12924 lavender seed




12920 deep purple



12916 pink panther




12931 indigo stack




12922 turquoise opal




12925 emerald city




12902 lime zest



12918 rolled gold



12901 sun burst



12904 scarlet fever

Specification

Product Description: Structure Bonded®
Pile Yarn Description: 85% Polypropylene 15% Nylon
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 8.0 mm +/-10%
Pile Weight: 1000 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



code


code is the next generation in structure-bonded® design, evolving from the technology that created lateral®.

code uses subtle contrasting stripes of colour and texture for a stylish defined look. Combine **code** with zip and lateral® to produce a unique floor design.



Specification

Product Description: Cut Pile
Pile Yarn Description: 100% Solution Dyed Nylon
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 8.0 mm +/-10%
Pile Weight: 850 g/m²
Tufts per m²: 157,480 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




origin is a luxurious, contemporary cut pile carpet tile, comprising 13 shades which create a wonderful broadloom appearance when used in large scale or smaller breakout areas. Made from 100% Premium Branded Solution Dyed Nylon, it is suitable for boardrooms, reception areas and most commercial spaces.



2126 gramplan gold 2128 angus tan 2129 falkirk fawn 2110 berkshire black 2109 glamorgan grey 2111 wiltshire charcoal 2102 Devon Blue



2104 hampshire slate 2107 surrey blue 2101 cornwall blue 2105 sussex sea 2106 kent mauve 2119 lancashire green 2118 Yorkshire Fern

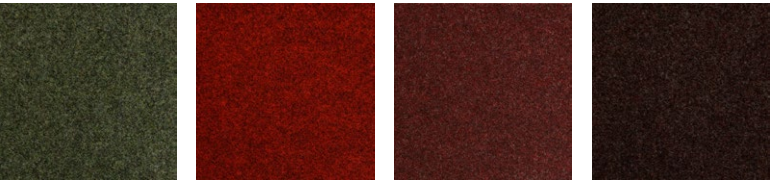

2117 cheshire jade 2115 norfolk sun 2114 shropshire maroon 2112 suffolk heather

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Roll Length: 30m
Roll Width: 2m
Total Thickness: 4.8 mm +/-10%
Total Weight: 915 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Cfl-s1

3230 classic

3230 classic is extremely durable fibre bonded carpet, perfectly suited for public buildings, such as schools and gyms and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a choice of 18 practical colourways.



Huddle area

Q 12031 tacoma tan □ 12131 cuban rum	Q 12032 atlanta beige □ 12132 belgian beige	Q 12034 austin clay □ 12134 latvian honey	Q 12001 nashville slate □ 12101 indian ebony	Q 12002 chicago grey □ 12102 danish charcoal	Q 12003 pittsburgh steel □ 12103 netherlands slate	Q 12005 little rock □ 12105 canadian diamond	Q 12014 st louis blue □ 12114 english blue
Q 12011 erie blue □ 12111 andorran blue	Q 12017 san francisco bay □ 12117 norwegian fjord	Q 12004 houston blue □ 12104 german steel	Q 12080 dallas heat □ 12180 japanese indigo	Q 12012 san diago sapphire □ 12112 portuguese purple	Q 12013 minneapolis mauve □ 12113 luxembourg lavender	Q 12081 grand rapids □ 12181 russian blue	Q 12007 westport navy □ 12107 czech blue
Q 12008 seattle blue □ 12108 icelandic sea	Q 12019 portland blue □ 12119 swiss ice	Q 12082 amarillo sky □ 12182 brazilian sky	Q 12022 omaha opal □ 12122 chinese turquoise	Q 12025 augusta green □ 12125 monaco marina	Q 12023 miami jade □ 12123 greek jade	Q 12083 moreno valley □ 12183 colombian emerald	Q 12030 los angeles lime □ 12130 lithuanian lime
Q 12051 cincinnati red □ 12151 spanish sunset	Q 12039 orlando orange □ 12139 ukrainian orange	Q 12087 aurora gold □ 12187 bolivian gold	Q 12088 fresno sun □ 12188 costa rican sun	Q 12084 charlotte boulevard □ 12184 australian violet	Q 12043 arlington rose □ 12143 chilean wine	Q 12085 baton rouge □ 12185 hungarian paprika	Q 12086 providence pink □ 12186 cambodian silk

Q roll 4200 sidewalk
□ tile cordiale

Specification Q

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Roll Length: 30m
Roll Width: 2m
Total Thickness: 6.0 mm +/-10%
Total Weight: 950 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1*

*200m2 minimum order quantity for Cf1-s1 rating

Specification □

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 7.8 mm +/-10%
Pile Weight: 950 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass BF-s1



































4200 sidewalk

4200 sidewalk is an extremely durable fine ribbed fibre bonded carpet sheet. It is ideally suited for schools, public buildings and commercial offices. Made from a high performance mix of solution dyed fibres, it is available in a range of 32 vibrant colours.

cordiale

cordiale is an extremely durable fine ribbed fibre bonded carpet tile. It is ideally suited for schools, public buildings and commercial offices. Made from a high performance mix of solution dyed fibres, it is available in a range of 32 vibrant colours.



							
<div>Q 11531 buffalo brown</div> <div>□ 11831 rishworth brown</div>	<div>Q 11532 harlem beige</div> <div>□ 11832 buckingham beige</div>	<div>Q 11534 rockland stone</div> <div>□ 11834 hereford stone</div>	<div>Q 11501 edison slate</div> <div>□ 11801 sedburgh slate</div>	<div>Q 11502 oregon grey</div> <div>□ 11802 gresham grey</div>	<div>Q 11503 lexington grey</div> <div>□ 11803 gordonstoun grey</div>	<div>Q 11505 waldorf grey</div> <div>□ 11805 sherborne grey</div>	<div>Q 11514 virginia blue</div> <div>□ 11814 oriel blue</div>
							
<div>Q 11511 newark blue</div> <div>□ 11811 repton blue</div>	<div>Q 11517 bowery blue</div> <div>□ 11817 winchester blue</div>	<div>Q 11504 staten steel</div> <div>□ 11804 durham steel</div>	<div>Q 11580 dutchess purple</div> <div>□ 11880 exeter indigo</div>	<div>Q 11512 bergen sapphire</div> <div>□ 11812 stamford sapphire</div>	<div>Q 11513 new york mauve</div> <div>□ 11813 malvern mauve</div>	<div>Q 11581 richmond blue</div> <div>□ 11811 strathallan blue</div>	<div>Q 11507 montana blue</div> <div>□ 11807 kings navy</div>
							
<div>Q 11508 hudson blue</div> <div>□ 11808 marlborough blue</div>	<div>Q 11519 new haven blue</div> <div>□ 11819 bradfield blue</div>	<div>Q 11582 long island sky</div> <div>□ 11882 dover teal</div>	<div>Q 11522 washington jade</div> <div>□ 11822 harrow green</div>	<div>Q 11525 madison marine</div> <div>□ 11825 rossall jade</div>	<div>Q 11523 newburgh jade</div> <div>□ 11823 monmouth moss</div>	<div>Q 11583 litchfield green</div> <div>□ 11883 ackworth green</div>	<div>Q 11530 colorado lime</div> <div>□ 11830 loreto lime</div>
							
<div>Q 11551 saratoga red</div> <div>□ 11851 rugby red</div>	<div>Q 11539 florida flame</div> <div>□ 11839 oundle orange</div>	<div>Q 11587 westchester gold</div> <div>□ 11887 epsom gold</div>	<div>Q 11588 syracuse sun</div> <div>□ 11888 kingsmead gold</div>	<div>Q 11584 queens purple</div> <div>□ 11884 wellington purple</div>	<div>Q 11543 texas rose</div> <div>□ 11843 keble rose</div>	<div>Q 11585 cortland rouge</div> <div>□ 11885 rougemont red</div>	<div>Q 11586 trenton pink</div> <div>□ 11886 dulwich pink</div>

- Q roll 4200 sidewalk
- tile cordiale

Specification Q

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Roll Length: 30m
Roll Width: 2m
Total Thickness: 6.5 mm +/-10%
Total Weight: 975 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1*

*200m2 minimum order quantity for Cfl-s1 rating

Specification □

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 7.8 mm +/-10%
Pile Weight: 975 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




4400 broadway

4400 broadway is an extremely durable broad ribbed fibre bonded carpet sheet and is particularly suited for public buildings, such as schools, and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a wide range of 32 exciting colourways.

academy


academy is an extremely durable broad ribbed fibre bonded carpet tile and is particularly suited for public buildings, such as schools, and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a wide range of 32 exciting colourways.

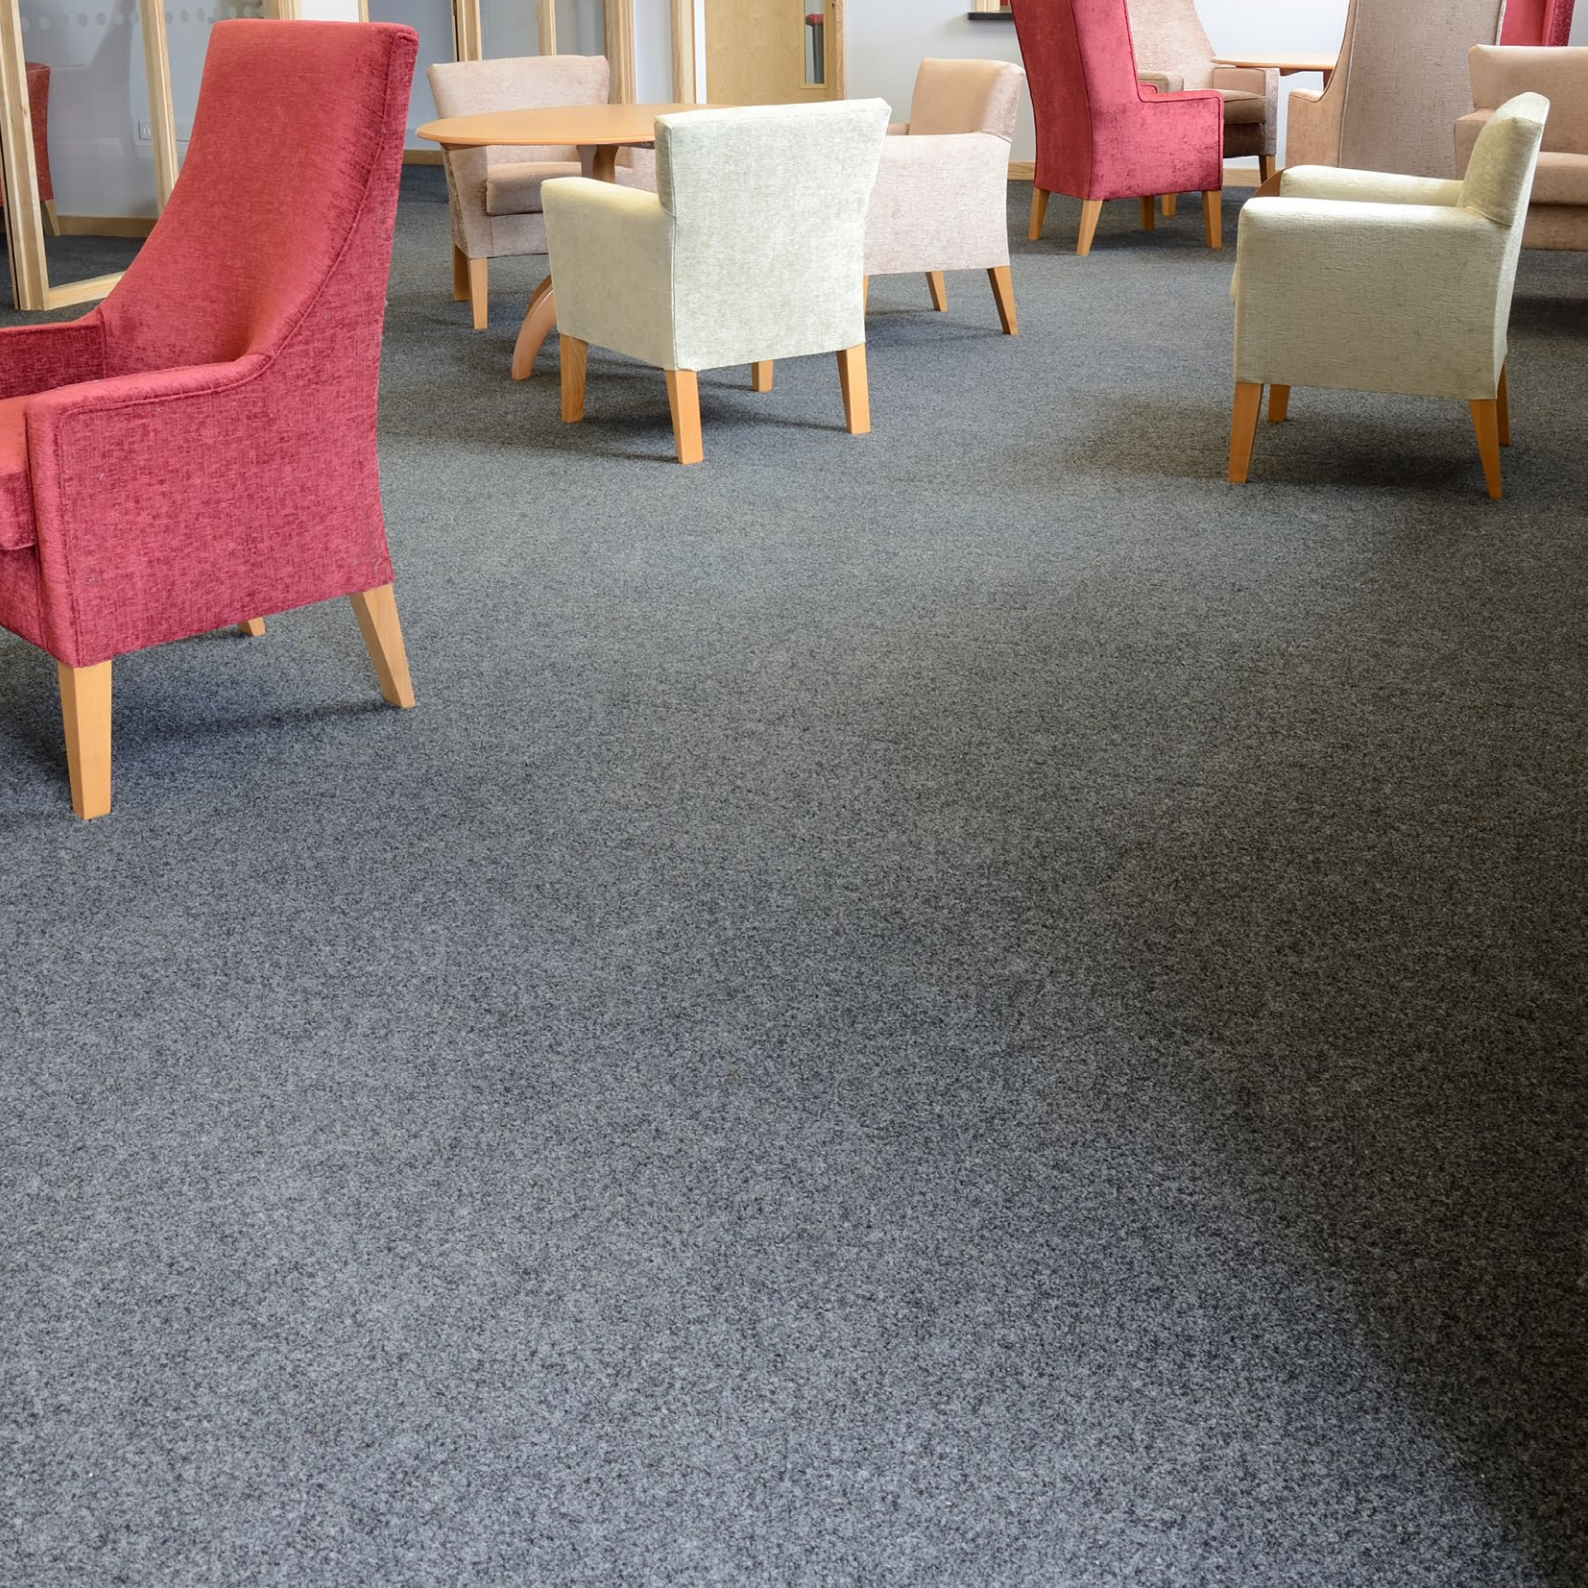


2670 black slate



2640 charcoal grey



2650 steel grey



2620 electric blue



2628 ocean blue



2656 summer sky




2642 teal green



2631 sea blue




2634 aqua



2666 deep indigo



2690 purple haze



2630 flame red

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 7.8 mm +/-10%
Pile Weight: 1000 g/m²
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1



rialto


rialto is an extremely durable heavy contract velour pile carpet tile. It is constructed from 100% polypropylene yarn and is ideally suited for public buildings, such as schools, and other commercial interiors. It is available in 12 colourways.



6070 yakama slate 6040 armenian grey 6050 norman steel 6023 iceni blue 6060 barona blue 6081 bavarian blue 6028 saxon blue



6056 spartan mauve 6061 skydancer 6036 phoenician green 6083 norse green 6045 trojan green 6055 dorian azure 6082 mayan sky

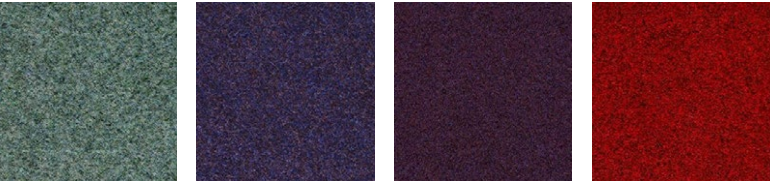

6022 assyrian jade 6066 navajo mauve 6090 persian purple 6062 red lake

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Roll Length: 30m
Roll Width: 2m
Total Thickness: 6.5 mm +/-10%
Total Weight: 1150 g/m² +/-10%
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 85% Polypropylene 15% Nylon
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 10 mm +/-10%
Pile Weight: 1200 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass BF-s1




5500 luxury

5500 is an extremely durable fibre bonded carpet sheet, ideally suited for public buildings, such as schools, and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a choice of 18 attractive colourways.

velour excel

velour excel is an extremely durable fibre bonded carpet tile, ideally suited for public buildings, such as schools, and other commercial interiors. Made from a high performance mix of solution dyed fibres, it is available in a choice of 18 attractive colourways.




18703 graphite block



18701 graphite




18702 graphite stripe



18706 sterling block



18704 sterling



18705 sterling stripe



18709 cobalt block



18707 cobalt



18708 cobalt stripe


Specification

Product Description: Performance Barrier System
Pile Yarn Description: 100% Solution Dyed Nylon (Polyamide-PA)
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 10.0 mm +/-10%
Pile Weight: 920 g/m²
Tufts per m2: 110,236 g/m²
Castor Chair Rating: BS EN 985 Pass
Body Voltage Test: BS ISO 6356:2000 <2kV
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass Bfl-s1




armour


armour offers the ultimate in entrance performance with its combination of absorber and scraper yarns, which protect internal floor finishes by trapping up to 90% of dirt and moisture, tracked in by foot and wheel traffic. The combination of plain, stripe and block stripes in the key blending colours of dark grey, warm grey and blue, will coordinate beautifully with any flooring design scheme. Armour is ideal for primary and secondary entrance areas, as well as lobby, lift areas and staircases.



1440 grey



1428 blue



1439 brown



1446 fawn




1436 green

Specification


Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Roll Length: 30m
Roll Width: 2m
Total Thickness: 10.0 mm +/-10%
Total Weight: 1490 g/m² +/-10%
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1

7700 grimebuster


7700 grimebuster is a heavy contract ribbed fibre bonded carpet. It is ideal for withstanding heavy footfall environments and creating an effective dirt barrier for busy entrances, which lead directly from outside environments.




1640 newmarket grey




1628 haydock blue



1639 goodwood brown



1646 wincanton fawn



1636 curragh green

Specification


Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 12.0 mm +/-10%
Pile Weight: 1170 g/m²
Total Weight: 4300 g/m²
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass BF-s1



grimebuster 50

grimebuster 50 is a heavy contract fibre bonded carpet tile with a deep diagonal rib surface.

It is ideal for withstanding heavy footfall environments and creating an effective dirt barrier for busy entrances, which lead directly from outside environments.

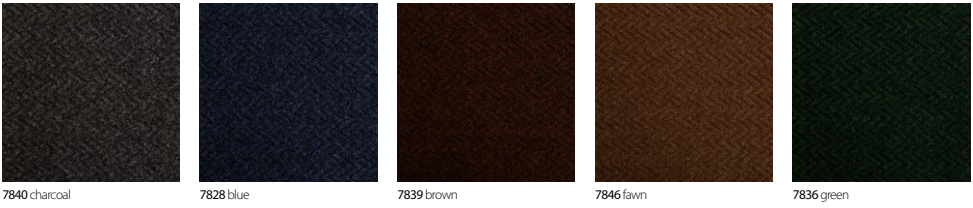


Specification

Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Roll Length: 30m
Roll Width: 2m
Total Thickness: 10.0 mm +/-10%
Total Weight: 1490 g/m² +/-10%
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass EF-s1

7800 chevrolay

7700 chevrolay is a heavy contract chevron ribbed fibre bonded carpet. It is ideal for withstanding heavy footfall environments and creating an effective dirt barrier for busy entrances, which lead directly from outside environments.

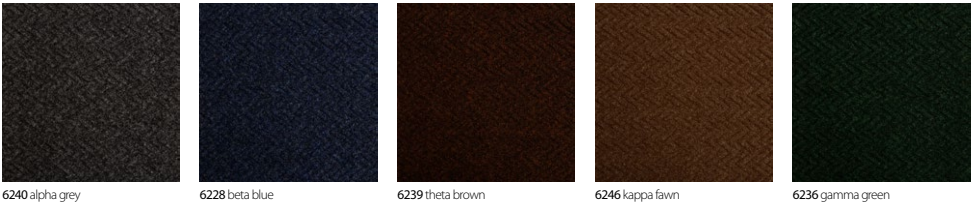

Specification

Product Description: Fibre Bonded
Pile Yarn Description: 100% Polypropylene
Tile Dimensions: 50 cm x 50 cm
Total Thickness: 12.0 mm +/-10%
Pile Weight: 1490 g/m²
Total Weight: 4300 g/m²
Colour Fastness To Light: Minimum grade 6
Flammability: Euroclass BF-s1



chevrolay 50

chevrolay 50 is a heavy contract chevron ribbed fibre bonded tile with deep chevron design.

It is ideal for withstanding heavy footfall environments and creating an effective dirt barrier for busy entrances, which lead directly from outside environments.

characteristics of the products

Name	Dimensions Rolls (R) / Tiles (T)	Product Type	Pile Description	Carpet Pile Weight g/m²	Tile Total Weight g/m²	Carpet Pile Height mm	Tile Total Thickness mm	Number of tufts x/m²	Backing	Flammability EN13501	Impact Noise	Number of SKUs	Suitable for Underfloor Heating	Body Voltage kV	Wear Classification	Colour Fastness to Light BS EN ISO 105	Slip Resistant	Castor Chair EN985
Alaska	T 50cm × 50cm	Multilevel Loop	100% Econyl Nylon(PA)	800	4200	5	7.5	226,771	Accummen®	Bfl-S1	22 dB	12	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Rainfall	T 50cm × 50cm	Multilevel Loop	100% Econyl Nylon(PA)	910	4300	5	7.5	236,220	Accummen®	Bfl-S1	24 dB	12	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Osaka	T 50cm × 50cm	Multilevel Loop	100% Nylon 6.6 (PA)	795	4200	5	7.5	226,771	Accummen®	Bfl-S1	22 dB	12	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Hadron	T 50cm × 50cm	Textured Loop	100% Nylon 6.6 (PA)	800	4240	3.5	6.5	177,165	Accummen®	Bfl-S1	23 dB	17	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Strands	T 50cm × 50cm	Textured Loop	100% Nylon(PA)	680	4430	4.5	7	180,976	Accummen®	Bfl-S1	23 dB	24	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Axis	T 50cm × 50cm	Textured Loop	100% Econyl Nylon(PA)	550	4000	3.5	7	177,165	Accummen®	Bfl-S1	20 dB	11	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Tandem	T 50cm × 50cm	Textured Loop	100% Nylon(PA)	620	4100	3.15	5	235,800	Accummen®	Bfl-S1	20 dB	6	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Go To	T 50cm × 50cm	Level Loop	100% Nylon(PA)	470	3780	3.0	5.5	196,850	Accummen®	Bfl-S1	20 dB	15	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Tivoli	T 50cm × 50cm P 25 cm x 100 cm	Level Loop	100% Nylon(PA)	600	4050	4	6.5	196,500	Accummen®	Bfl-S1	23 dB	38	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Tivoli Mist	T 50cm × 50cm P 25 cm x 100 cm	Level Loop	100% Nylon(PA)	600	4050	4	6.5	196,500	Accummen®	Bfl-S1	23 dB	38	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Infinity	T 50cm × 50cm	Level Loop	100% Nylon(PA)	550	4000	4.8	7.3	196,500	Accummen®	Bfl-S1	28 dB	18	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Grade	T 50cm × 50cm P 25 cm x 100 cm	Level Loop	100% Nylon(PA)	620	4100	3.5	6	235.800	Accummen®	Bfl-S1	21dB	9	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance	T 50cm × 50cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	18	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance Echo	T 50cm × 50cm P 25 cm x 100 cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	18	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance Stripe	T 50cm × 50cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	6	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance Atomic	T 50cm × 50cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	20	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Balance Greyscale	T 50cm × 50cm	Level Loop	100% Nylon(PA)	550	4300	4.5	7	176,850	Accummen®	Bfl-S1	24 dB	1	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
Lateral	T 50cm × 50cm	Structure Bonded	85%PP 15%PA	950	4200	5.5*	7.8	-	Accummen®	Bfl-S1	18 dB	18	Yes below 27°	<2.0	HC	>6	NPD	Pass
Zip	T 50cm × 50cm	Structure Bonded	85%PP 15%PA	1000	4250	5.5*	8	-	Accummen®	Bfl-S1	17 dB	11	Yes below 27°	<2.0	HC	>6	NPD	Pass
Code	T 50cm × 50cm	Structure Bonded	85%PP 15%PA	1000	4250	5.5*	8	-	Accummen®	Bfl-S1	17 dB	11	Yes below 27°	<2.0	HC	>6	NPD	Pass
Origin	T 50cm × 50cm	Cut Pile	100% Nylon(PA)	850	4300	5	8	157,480	Accummen®	Bfl-S1	23 dB	13	Yes below 27°	<2.0	Class 33	>6	NPD	Pass
3230 Classic	R 2m × 30m	Fibre Bonded Sheet	85%PP 15%PA	915		4.8		-	Uniform	Cfl-S1	17 dB	18	Yes below 27°	<2.0	HC	>6	NPD	Pass
4200 Sidewalk	R 2m × 30m	Fibre Bonded Sheet	85%PP 15%PA	950		6		-	Uniform	Efl-S1	18 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
4200 SidewalkFR	R 2m × 30m	Fibre Bonded Sheet	85%PP 15%PA	950		6		-	Uniform	Cfl-S1	18 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
Cordiale	T 50cm × 50cm	Fibre Bonded Tile	85%PP 15%PA	950	4200	6	7.8	-	Accummen®	Bfl-S1	18 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
4400 Broadway	R 2m × 30m	Fibre Bonded Sheet	85%PP 15%PA	975		6.5		-	Uniform	Efl-S1	19 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
4400 BroadwayFR	R 2m × 30m	Fibre Bonded Sheet	85%PP 15%PA	975		6.5		-	Uniform	Cfl-S1	19 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
Academy	T 50cm × 50cm	Fibre Bonded Tile	85%PP 15%PA	975	4200	6.5	7.8	-	Accummen®	Bfl-S1	21 dB	32	Yes below 27°	<2.0	HC	>6	NPD	Pass
Rialto	T 50cm × 50cm	Fibre Bonded Tile	100%PP	1000	4450	6	7.8	-	Accummen®	Bfl-S1		12	Yes below 27°	<2.0	HC	>6	NPD	Pass
5500 Sheet	R 2m × 30m	Fibre Bonded Sheet	85%PP 15%PA	1150		6.5		-	Uniform	Efl-S1	21 dB	18	Yes below 27°	<2.0	HC	>6	NPD	Pass
Velour Excel	T 50cm × 50cm	Fibre Bonded Tile	85%PP 15%PA	1200	4900	8	10	-	Accummen®	Bfl-S1	21 dB	18	Yes below 27°	<2.0	HC	>6	NPD	Pass

entrance matting

Name	Dimensions Rolls (R) / Tiles (T)	Product Type	Pile Description	Carpet Pile Weight g/m²	Total Weight g/m²	Thickness mm	Backing	Flammability EN13501	Number of SKUs	Wear Classification	Colour Fastness to Light BS EN ISO 105	Slip Resistant
Armour	T 50cm × 50cm	Cut Pile	100%PA	920	4500	10	Accummen®	Bfl-S1	9	Class 33	>6	DS
7700 Grimebuster	R 2m × 30m	Fibre Bonded Sheet	100% PP		1490	10	Uniform	Efl-S1	5	HC	>6	NPD
Grimebuster 50	T 50cm × 50cm	Fibre Bonded Tile	100% PP	1490	4300	12	Accummen®	Bfl-S1	5	HC	>6	NPD
7800 Chevrolay	R 2m × 30m	Fibre Bonded Sheet	100% PP		1490	10	Uniform	Efl-S1	5	HC	>6	NPD
Chevrolay 50	T 50cm × 50cm	Fibre Bonded Tile	100% PP	1490	4300	12	Accummen®	Bfl-S1	5	HC	>6	NPD

Appendix

7	rainfall	47	balance greyscale
9	osaka	49	lateral
11	alaska	51	zip
13	hadron	53	code
15	strands	55	origin
17	axis	57	3230 classic
19	tandem	59	4200 sidewalk
21	go to	59	cordiale
23	tivoli mist	61	4400 broadway
25	tivoli tile 2019	61	academy
29	tivoli plank 2019	63	rialto
31	tivoli tile	65	5500 luxury
33	tivoli plank	65	velour excel
35	infinity	67	armour
37	grade	69	7700 grimebuster
39	balance	69	grimebuster 50
41	balance echo	71	7800 chevrolay
43	balance stripe	71	chevrolay 50
45	balance atomic		





burmatex®

Head Office
 Victoria Mills, The Green
 Ossett
 West Yorkshire
 WF5 0AN
 United Kingdom

Tel: +44 (0) 1924 262525
 Fax: +44 (0) 1924 280033
 Email: projects@burmatex.co.uk
 Web: www.burmatex.co.uk

International Enquires
international@burmatex.co.uk

Eastern Europe Office
 Burmatex Sp. z o.o.
 Andersia Business Centre
 Plac Andersa 7
 61-894 Poznań, Poland

Tel: + 48 61 668 3883
 Mob: + 48 603 548 074
 Mob: + 48 696 057 065
 email: biuro@burmatex.pl

Plank installation methods

Monolithic



Half Drop



Random Drop



Herringbone



Tile installation methods

Quarter Turn



Monolithic



Random



Brick



Half Drop




Alternate rows
rotated 180°



Alternate tiles
rotated 180°



Large Quarter Turn



Parquet

